



INTRODUCING
SX 25.

**EXPLORE YOUR
NEIGHBORHOOD.**



POCKET
FRIENDLY



LOW ON
MAINTENANCE



NO LICENSE
REQUIRED

AVAILABLE IN



www.lectrixev.com

*Colours shown are only for representative purpose. Actual colours may vary.

LI-ION VEHICLE SPECS	
PARAMETERS	SX25 LEAD ACID
TWHEEL BASE(MM)	1330
GROUND CLEARANCE (MM)	160
SEAT HEIGHT (MM)	760
DIMENSIONS (LXWXH) MM	1870X710X1260
MOTOR	250, HUB-BLDC
CONTROLLER	48V
DIVING MODE-SPEED (KM/H)	25KM/H
GRADEABILITY	7° (DUAL)
LOADING CAPACITY (KG)	150
BRAKE	FRONT BRAKE-DRUM REAR BRAKE-DRUM
TYRE	90/100-10, TUBELESS 90/100-10 TUBELESS
BATTERY SPECIFICATION/TYPE	48V/28 AH LEAD ACID
BATTERY WEIGHT (KG)	10
CHARGER SPECIFICATION	7.5A
CHARGING TIME (HR)	4
SUSPENSION	FRONT: TELESCOPIC REAR: DUAL COIL SPRING
SPEEDOMETER	DIGITAL LCD
KERB WEIGHT OF VEHICLE	70KG
FRONT WHEEL SIZE & TYPE	10 INCH, SHEET METAL
IGNITION SWITCH (HANDLE LOCK)	KEY
HEAD LIGHT	BULB
TAIL LIGHT	BULB
TURN SIGNAL LAMP	BULB
REAR REGISTRATION PLATE LIGHT	BULB
RANGE/CHARGE (KM)	60



**FOLLOW ME
HEAD LAMP**

DRL's to ensure safety on the road with ease of visibility




**DIGITAL CLUSTER
WITH LCD**

Digital LCD cluster with Bluetooth connection for Smart connectivity



**SUFFICIENT
STORAGE SPACE**

Under seat storage to ensure sufficient space for your belongings

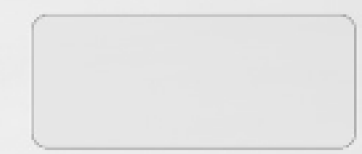

Regd. Office: Lectrix EV Pvt. Ltd.
Lectrix EV Private Limited, Plot No. 448-2, Sector-8,
Phase-IV, Ind. Manesar, Gurgaon, Haryana 122051
Service Support – support@lectrixev.com
Toll free number – 8001021000